




VISHAY
PRECISION
GROUP

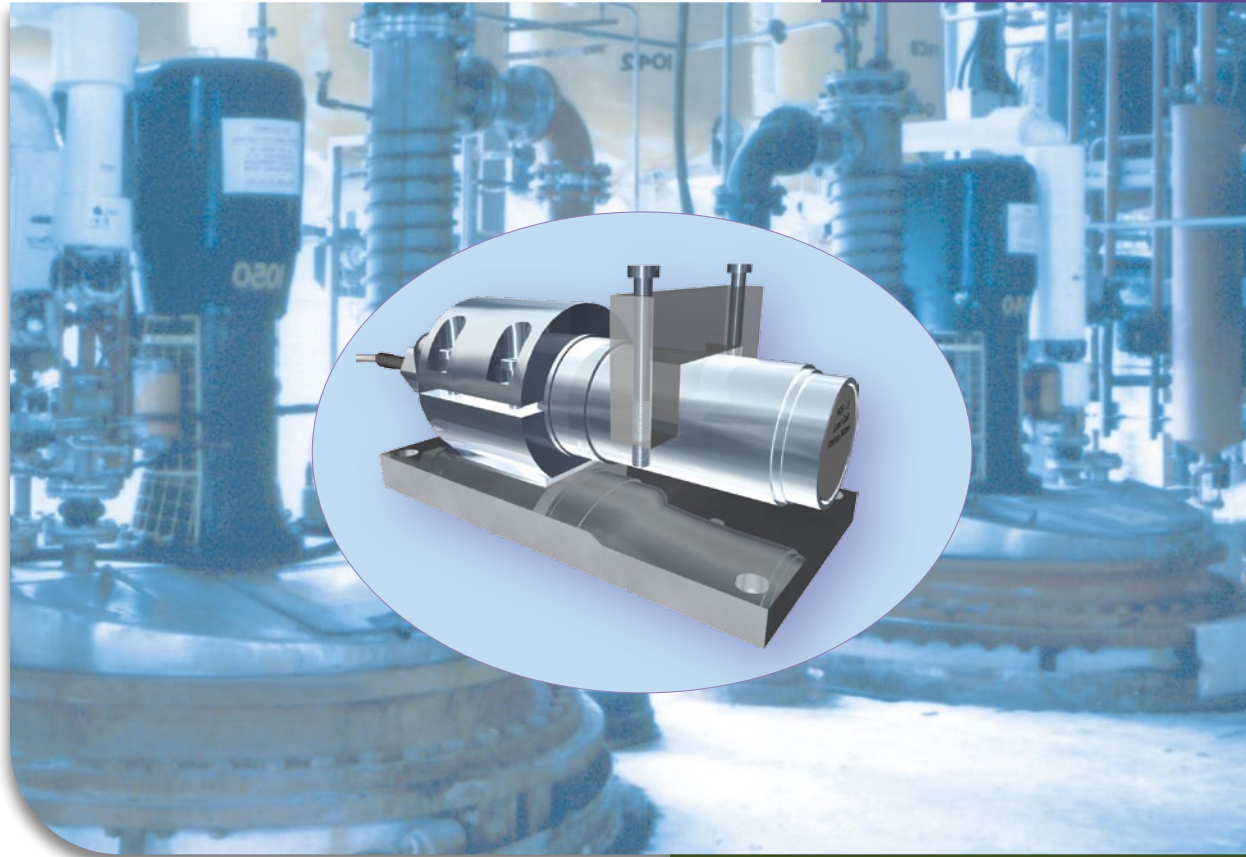

Market Solutions

KIS Beam Technology
BLH • Nobel Weighing Systems
Brands of VPG Process Weighing



Nobel
Elektronik


www.weighingsolutions.com

The KIS Double Cantilever Advantage

Start with the best gages
and the best gage configuration


KIS Beam technology incorporates SR-4® foil strain gages connected as a full Wheatstone bridge that is temperature-compensated and calibrated to deliver accuracy and reliability. And because all KIS Beams are factory-calibrated, installation and setup are quick and easy with no need for on-site calibration (unless mechanical obstructions prevent a “freestanding” vessel).

- Full temperature compensation eliminates drift
- Matched outputs provide simple replacement
- Factory calibration for repeatability, reliability, and low installation cost
- 0.01% repeatability: 0.02% combined error

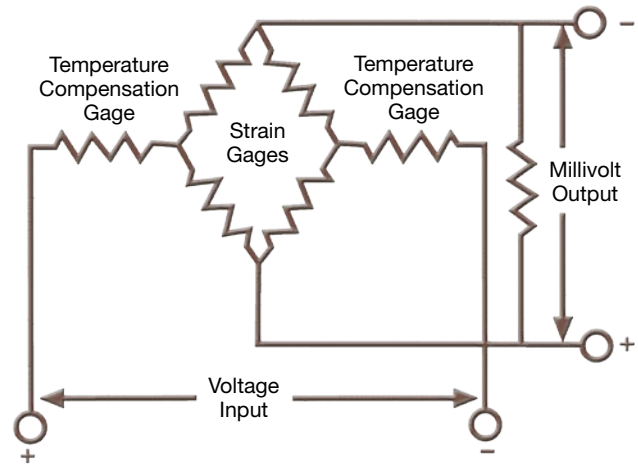

Full Wheatstone bridge electronic configuration

Then ...

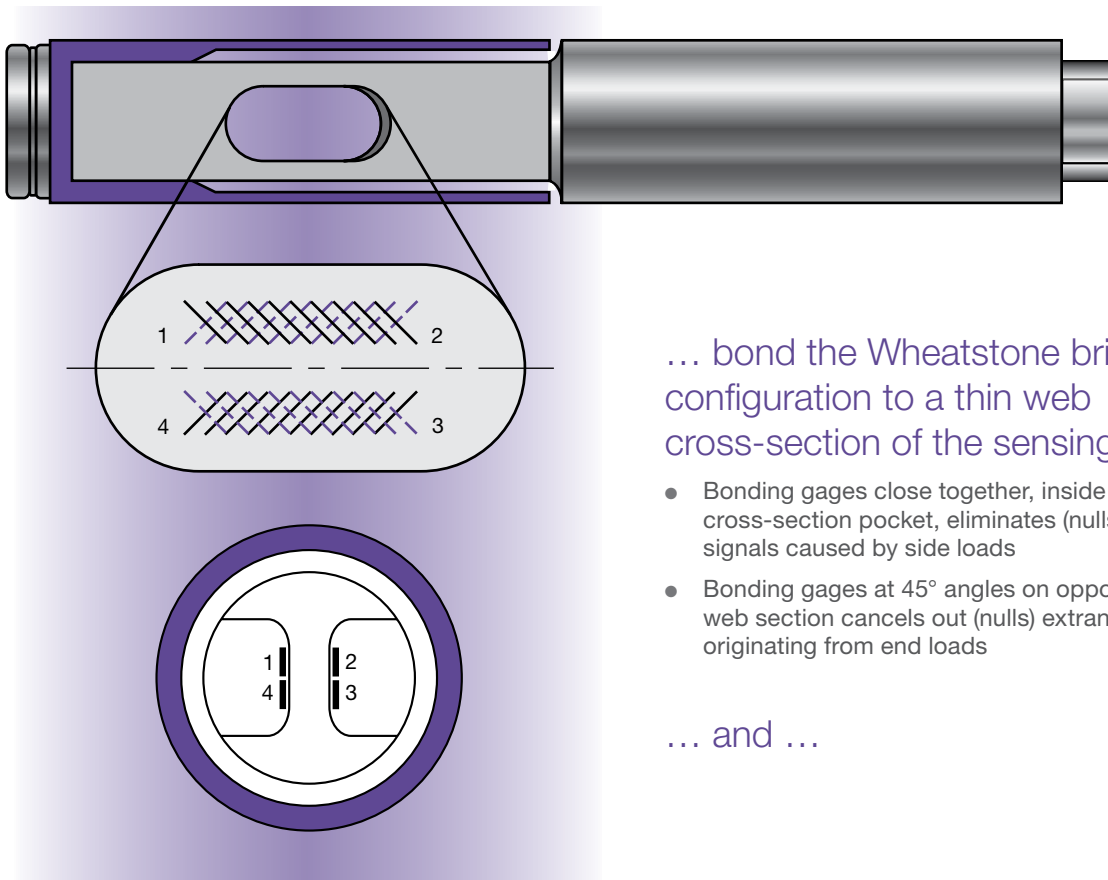

... bond the Wheatstone bridge
configuration to a thin web
cross-section of the sensing element ...

- Bonding gages close together, inside of a machined cross-section pocket, eliminates (nulls) extraneous force signals caused by side loads
- Bonding gages at 45° angles on opposite sides of the web section cancels out (nulls) extraneous force signals originating from end loads


... and ...

... place the load right over the gages


KIS Beam design adds a second or "Double" cantilever sleeve over the actual load beam.

This locates the load force application point directly above the gages. Placing the Wheatstone bridge gage network beneath the applied load results in significant performance advantages:


- Side load force sensitivity is virtually eliminated
- Moment stresses upon the gages are "zero"
- Bending stress at the mounting base is reduced by 50%
- Shears stresses remain constant
- Moving or sliding the load point produces negligible effect on output
- The measurement signal represents the only true applied force

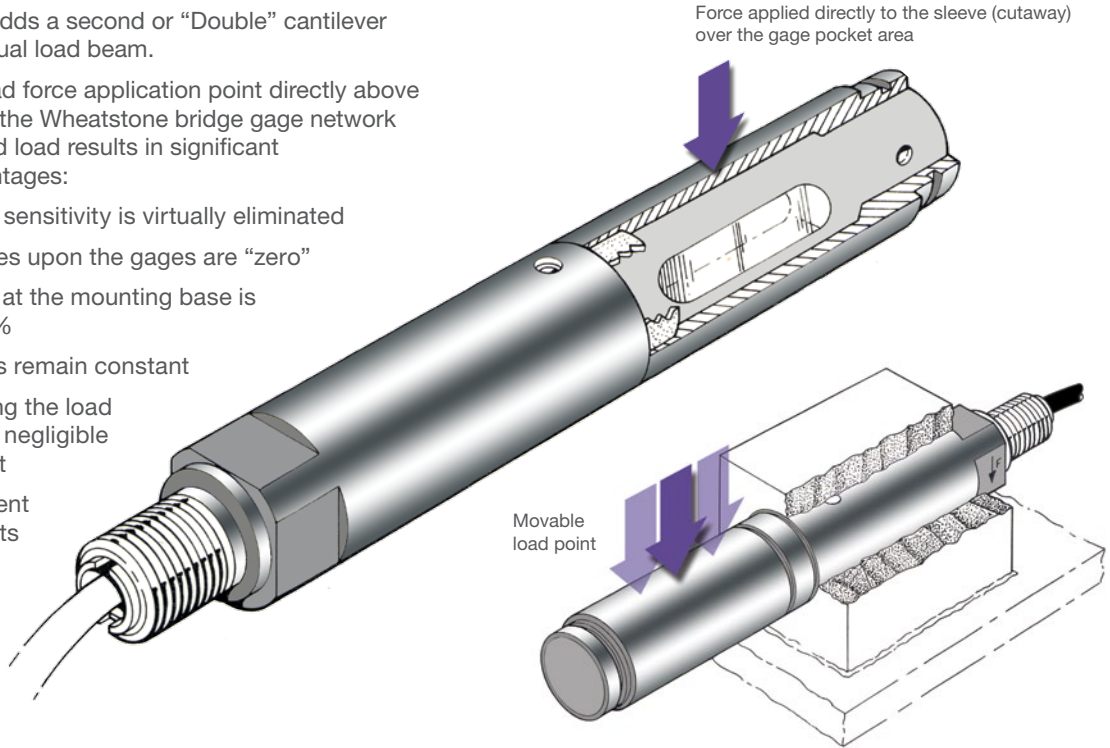


Double Cantilever Shear Beam

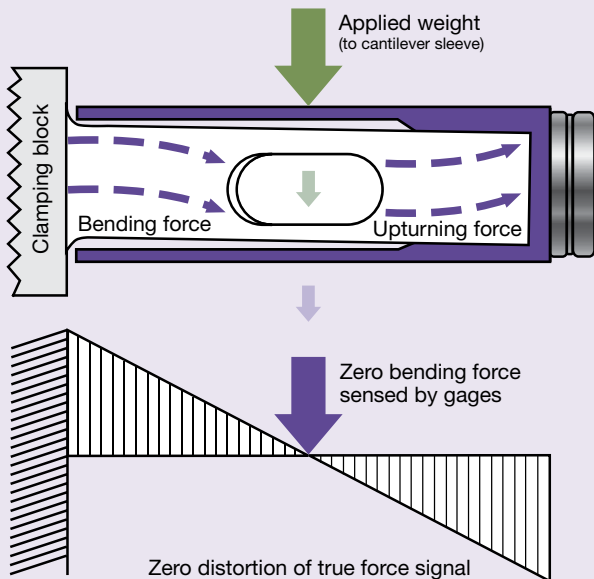


Single Cantilever Bending Beam

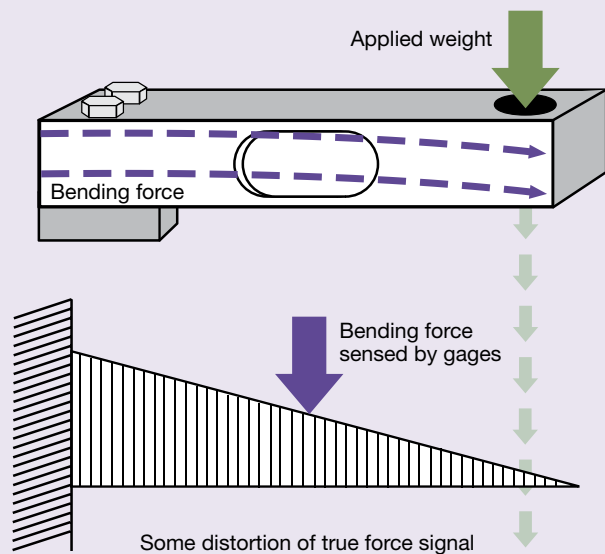


Moving Load



Vibration from agitation




Thermal expansion




Twisting moment caused by agitator



Standard tank weighing

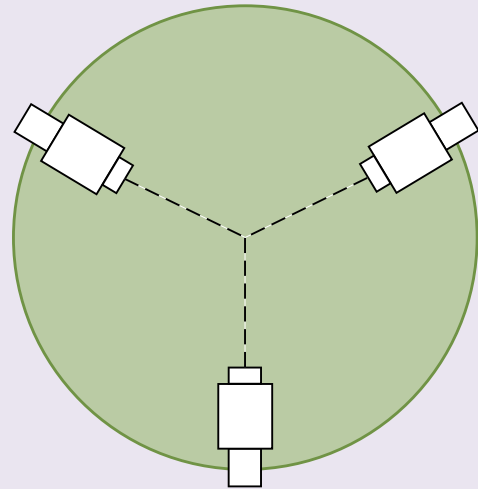


Orienting the load cells towards the center gives a self-locking design that counteracts movement.

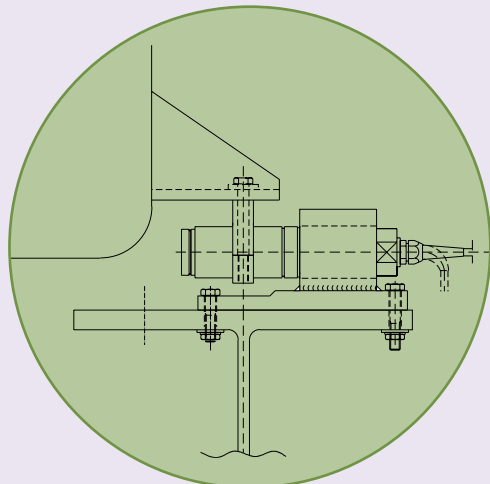

Force measurement in materials testing

Cylindrical Design Provides Top Performance

The second secret of superior KIS performance is the cylindrical design. KIS beams can be rotated within the module hardware to coincide with the exact direction of applied weight. Cylindrical, electro-polished stainless steel provides a nearly frictionless surface for the module yoke to slide on during periods of thermal expansion and contraction.

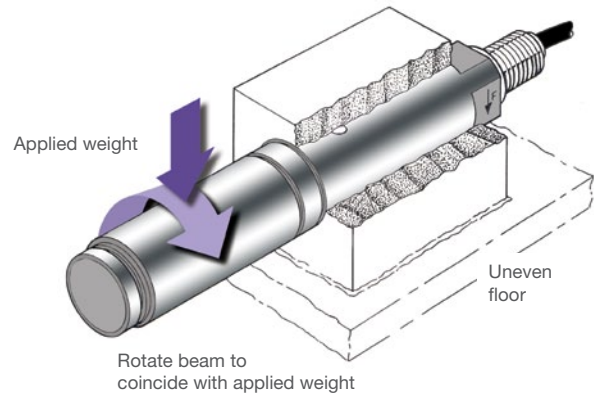


Make it a Module

Adding a stainless steel split clamping block and mounting yoke completes the KIS Beam package. Easy installation, unbeatable accuracy, and IP67 environmental protection make KIS Weigh modules the industry standard for demanding applications. Superior KIS specifications include:

- Accuracy of 0.02%
- Repeatability of 0.01%

These specifications apply to the complete module, not just the beam.

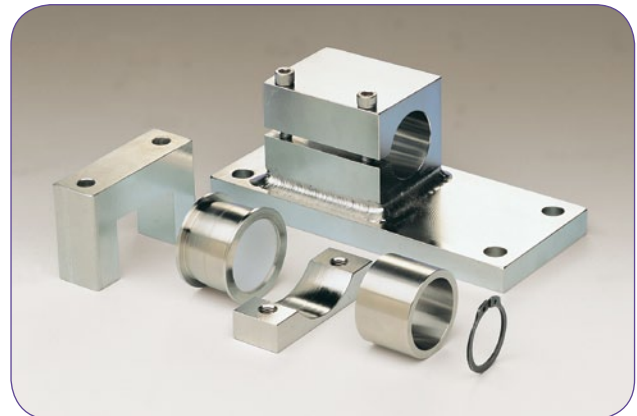

Materials and Finishes

Stainless steel version of the KIS are perfect for food and pharmaceutical applications. Mounting hardware is fabricated from austenitic stainless steel, which has excellent corrosion resistance. The electro-polished finish, rounded surfaces, and minimal crevices allow for easy cleaning.

Strong Enough for the Toughest Environments

KIS Weigh Modules, mounted on dynamic process vessels in harsh, washdown areas, know how to “play dirty.” In fact, they excel in the roughest environments. Corrosive acids, harsh industrial detergents, caustic vapors, and granulated powders never compromise their superior performance. Here’s why:


- 15-5 PH stainless steel construction
- FM and CSA approval Class I, II, III; Div. 1,2 Groups A-G
- ATEX certified versions for use in explosive atmospheres are available: II 1GD.
- Design meets ANSI/UBC wind and seismic requirements



- NEMA 4-compliant and IP67-compliant
- NTEP-certified with KIS-3 beam—conforming to the requirements of NIST Handbook 44

Vessel Passes Through Floor

- Orient all modules so that they face radially inward to restrain the vessel in the lateral direction.
- Bolt modules to a uniform surface. If located on structural "I" beams, all beams must be both parallel and level.
- If thermal insulation pads are not required, bolt the module yoke directly to the vessel gusset.
- If thermal insulation pads are required to reduce heat conduction, order optional adapter plates and thermal pads.



Freestanding Upright Vessels

- Orient all modules so that they face radially inward to restrain the vessel in the lateral direction.
- Bolt modules to a uniform or prepared surface that is both parallel and level. Using concrete grout pads satisfies both requirements.
- Optional adapter plates usually are needed to provide support for the vessel legs.
- If the vessel is extremely tall, or located out-of-doors, additional lateral restrains might be required to prevent tipping.
- Thermal insulation pads prevent heat conduction.



Other Products Offered

BLH • Nobel Weighing Systems



Load Cells and Weighing Modules

We offer high-quality load cells and weighing modules. Our standard KIS, KOSD, KIMD and KISD can be customized to meet special requirements.

Standard Load Cells and Weighing Modules			
Features		Products	
<ul style="list-style-type: none"> • Easy to install • Moveable load point • Insensitive to side loads • High accuracy • Rugged construction • IP67 protection • ATEX, FM, CSA, OIML and NTEP approved versions 		<ul style="list-style-type: none"> • KIS—1, 2, 3, 8, 9, 11, and 12 • KISD-6 • KOSD-101, -107, and -115 • KOSD-40 • KIMD-1 • KOM-1 • Z-Blok • KDH-3 	<ul style="list-style-type: none"> • EconoMount weigh modules • EconoMount level systems • Pro-Mount weigh modules • EZ-Mount weigh modules • Alpha Beam
Special Load Cells Products			
<ul style="list-style-type: none"> • Customized to meet specific requirements • Moveable load point • Insensitive to side loads • High accuracy • Rugged construction • IP67 protection • ATEX, FM, CSA, OIML and NTEP approved versions • Available with built-in transmitters 		<ul style="list-style-type: none"> • KOSD • KIMD • KIS • KISD 	
Standard and Customized Web Tension Blocks			
<ul style="list-style-type: none"> • Easy to install • Models for both low- and high-tension applications • High accuracy • Rugged construction • IP67 protection • ATEX, FM, CSA approved versions 		<ul style="list-style-type: none"> • FMU (high tension) • TU-2 (high tension) • PST Tensiometers • Extensometer • HTU (high tension) 	<ul style="list-style-type: none"> • HTZ-3 (high tension) • GLT (low tension) • LTT (low tension) • Others

Through VPG Transducers, our sister division, we also offer low-cost, high-accuracy load cells and mounting hardware for use in all kinds of systems:

- | | |
|---|---|
| <ul style="list-style-type: none"> • Single-point load cells • Shear beam load cells • Pin load cells • Double-ended shear beams • Damped load cells | <ul style="list-style-type: none"> • Bending-beams • Compression load cells • S-type load cells • Digital load cells • Mounting hardware |
|---|---|



DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein. Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

The Americas

- United States** **Vishay Precision Group – BLH**
3 Edgewater Drive • Norwood, MA 02062
Ph: +1-781-298-2200 • Fax: +1-781-762-3988
E-mail: pw.usa@vishaypg.com
- Canada** **Vishay Precision Group – BLH**
14 Steinway, Unit 10 • Toronto • Ontario M9W 6M6
Ph: +1-800-567-6098 (toll free), +1-416-251-2554 • Fax: +1-416-251-2690
E-mail: pw.can@vishaypg.com

Asia

- Taiwan, R.O.C.** **Vishay Precision Group – Weighing Systems***
8F-1, 171, Section 2, Datong Road • Sijhih City, Taipei 22183
Ph: +886-2-8692-6888 • Fax: +886-2-8692-6818
E-mail: pw.roc@vishaypg.com
*Asia except China
- P.R. China** **Vishay Precision Group – Weighing Systems**
A8220, Shanghai Jia Hua Business Center
No. 808 Hong Qiao Road • Shanghai 200030
Ph: +86-21-6448-6090, Ext. 6098 • Fax: +86-21-6448-6070
E-mail: pw.prc@vishaypg.com
- Israel** **Vishay Precision Group – Weighing Systems**
2 HaOfan Street • Holon 58814
Ph: +972-3-557-0888 • Fax: +972-3-556-8116
E-mail: pw.il@vishaypg.com

Europe

- United Kingdom** **Vishay Precision Group – Nobel Weighing Systems**
Airedale House • Canal Road • Bradford BD2 1AG
Ph: +44-1274-782229 • Fax: +44-1274-782230
E-mail: pw.uk@vishaypg.com
- Germany** **Vishay Precision Group – Nobel Weighing Systems**
Tatschenweg 1 • 74078 Heilbronn
Ph: +49-7131-39099-0 • Fax: +49-7131-39099-229
E-mail: pw.de@vishaypg.com
- France** **Vishay Precision Group – Nobel Weighing Systems**
16 Rue Francis Vovelle • 28000 Chartres
Ph: +33-2-37-33-31-25 • Fax: +33-2-37-33-31-29
E-mail: pw.fr@vishaypg.com
- Sweden** **Vishay Precision Group – Nobel Weighing Systems**
P.O. Box 423 • SE-691 27 Karlskoga
Ph: +46-586-63000 • Fax: +46-586-63099
E-mail: pw.se@vishaypg.com
- Norway** **Vishay Precision Group – Nobel Weighing Systems**
Brobekkeveien 80 • 0582 Oslo
Ph: +47-22-88-40-90 • Fax: +47-22-88-40-99
E-mail: pw.no@vishaypg.com